

538, 977

(12) INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(19) World Intellectual Property
Organization
International Bureau



(43) International Publication Date
8 July 2004 (08.07.2004)


PCT

(10) International Publication Number
WO 2004/057897 A1

- (51) International Patent Classification⁷: **H04Q 7/38** [FI/FI]; Tallbergin puistotie 1 C 25, FIN-00200 HELSINKI (FI).
- (21) International Application Number: PCT/FI2003/000970 (74) Agent: **FORSSÉN & SALOMAA OY**; Eerikinkatu 2, FIN-00100 HELSINKI (FI).
- (22) International Filing Date: 18 December 2003 (18.12.2003) (81) Designated States (*national*): AE, AG, AL, AM, AT (utility model), AT, AU, AZ, BA, BB, BG, BR, BW, BY, BZ, CA, CH, CN, CO, CR, CU, CZ (utility model), CZ, DE (utility model), DE, DK (utility model), DK, DM, DZ, EC, EE (utility model), EE, EG, ES, FI (utility model), FI, GB, GD, GE, GH, GM, HR, HU, ID, IL, IN, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MA, MD, MG, MK, MN, MW, MX, MZ, NI, NO, NZ, OM, PG, PH, PL, PT (utility model), PT, RO, RU, SC, SD, SE, SG, SK (utility model), SK, SL, SY, TJ, TM, TN, TR, TT, TZ, UA, UG, US, UZ, VC, VN, YU, ZA, ZM, ZW.
- (25) Filing Language: English
- (26) Publication Language: English
- (30) Priority Data: 20022248 20 December 2002 (20.12.2002) FI
- (71) Applicant (*for all designated States except US*): **NOKIA CORPORATION** [FI/FI]; Keilalahdentie 4, FIN-02150 ESPOO (FI).
- (72) Inventor; and
- (75) Inventor/Applicant (*for US only*): **RINNE, Mikko**
- (84) Designated States (*regional*): ARIPO patent (BW, GH, GM, KE, LS, MW, MZ, SD, SL, SZ, TZ, UG, ZM, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM),

[Continued on next page]

(54) Title: METHOD, DEVICE, BASE STATION AND SYSTEM FOR DIRECT UPLINK ACCESS IN A MOBILE COMMUNICATIONS NETWORK

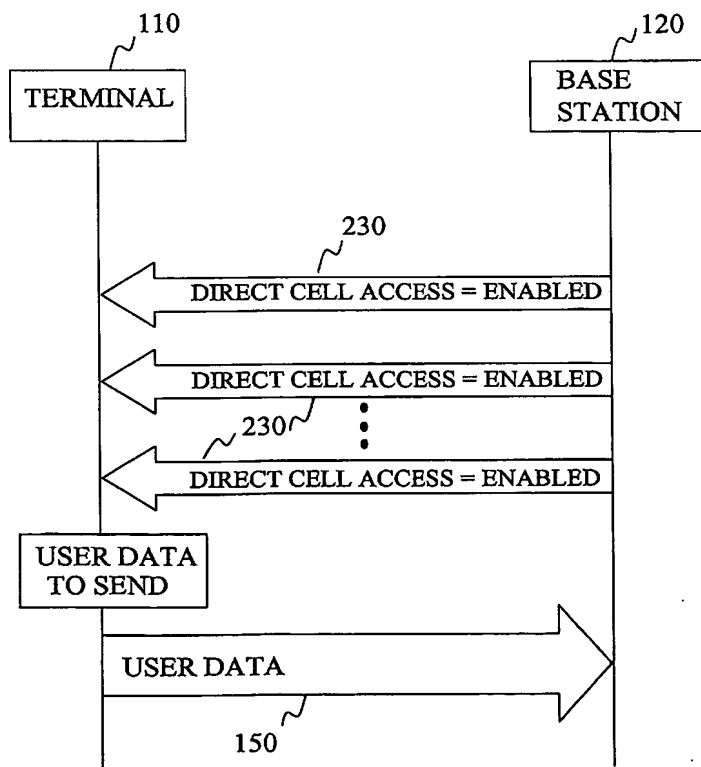

(57) Abstract: The invention relates to a method between a communications device (110) and a communications network, which communications network generally provides at least a direct cell access mechanism and an alternative cell access mechanism for the communications device for uplink access to the communications network. The method comprises determining by the communications network and indicating (230) to the communications device (110) whether the direct cell access mechanism can at a given time be provided. This being the case, the communications device can directly start sending user data (150) on a traffic channel. In a situation in which the direct cell access cannot be provided, it is indicated to the communications device that the alternative cell access mechanism should be used.

WO 2004/057897 A1

BEST AVAILABLE COPY



European patent (AT, BE, BG, CH, CY, CZ, DE, DK, EE, ES, FI, FR, GB, GR, HU, IE, IT, LU, MC, NL, PT, RO, SE, SI, SK, TR), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GQ, GW, ML, MR, NE, SN, TD, TG).

For two-letter codes and other abbreviations, refer to the "Guidance Notes on Codes and Abbreviations" appearing at the beginning of each regular issue of the PCT Gazette.

Published:

— *with international search report*

Method, device, base station and system for direct uplink
access in a mobile communications network

FIELD OF THE INVENTION

- 5 The invention relates to uplink access in a communications system.

BACKGROUND OF THE INVENTION

- 10 One of the problems in the performance of current cellular mobile communications systems is the service access time, i.e. the duration it takes after a user requests a service until the service is delivered. One important contributor to the lengthiness of the service access time is the used cell access mechanism.

- Figure 1 shows the basic principle of a cell access mechanism widely used in the
15 second-generation cellular mobile communications systems. When a terminal 110 has user data to send it transmits to a network an access request message 111 on a Random Access CHannel (RACH) and waits for a response from the network before user data can be transmitted. For example, in GSM GPRS (General Packet Radio Service), an access request message is conveyed via a base station 120 to a
20 base station controller (not shown) which may contain a unit performing radio resource allocation. As a result, an access grant message 121 identifying a dedicated radio transmission resource to be used for user data transmission is transmitted from the network to the terminal 110 on an Access Grant Channel (AGCH). After receipt of the access grant message 121, depending on message contents, the
25 terminal 110 either has to wait for an assigned Uplink State Flag (USF) from the network before it can start sending user data 150 or it can immediately start sending user data 150 on the assigned Traffic Channel (TCH) as identified by the access grant message 121.

- 30 The cell access mechanism just described causes a relatively long minimum access delay before any user data can be transmitted. This is due to the fact that ra-

radio resources must first be requested before user data transmission can be started. The minimum access delay exists even if the radio resources of the current base station are unoccupied.

- 5 Third generation cellular mobile communications systems present improvements to the situation. For example, in a WCDMA system (Wideband Code Division Multiple Access) user data can be transmitted in a RACH message but the amount of user data which can be included in a RACH message is very limited. Although a dedicated traffic channel (DCH) providing more radio resources may subse-
- 10 quently be set up, this is not an ideal solution e.g. for a terminal which would immediately desire to start sending user data at a high data rate.

The WCDMA system also provides a Common Packet CHannel (CPCH) which allows higher data rates but can not support mobility, such as normal handovers or

15 macrodiversity reception (i.e. soft handover).

SUMMARY OF THE INVENTION

According to a first aspect of the invention, there is provided a method between a

20 communications device and a communications network, which communications network generally provides at least a direct cell access mechanism and an alternative cell access mechanism for the communications device for uplink access to the communications network, the method comprising:

determining by the communications network and indicating to the communica-

25 tions device whether the direct cell access mechanism can at a given time be provided.

Preferably, said indicating comprises indicating whether the communications device can directly start sending user data on a traffic channel.

30

In one embodiment, the determination whether the direct cell access mechanism

can be provided is made based on radio and/or traffic measurements performed by a base station.

5 Preferably, if the direct cell access cannot be provided, the method comprises indicating to the communications device that the alternative cell access mechanism should be used. In one embodiment, the alternative cell access mechanism comprises using a separate access channel, such as RACH, for uplink access.

10 In one embodiment, said indication is performed by including a particular parameter value in a system information broadcast.

According to a second aspect of the invention, there is provided a communications device configured for operation with a communications network, which communications network generally provides at least a direct cell access mechanism and an alternative cell access mechanism for the communications device for
15 C uplink access to the communications network, the communications device comprising:

means for receiving an indication sent by the communications network, the indication indicating to the communications device whether the direct cell access
20 mechanism can at a given time be provided.

In one embodiment, the communications device is a mobile hand-held device of a cellular communications network.

25 According to a third aspect of the invention, there is provided a base station of a communications network, which communications network generally provides at least a direct cell access mechanism and an alternative cell access mechanism for a communications device for uplink access to the communications network, the base station comprising:

30 means for determining and indicating to the communications device whether the direct cell access mechanism can at a given time be provided.

According to a fourth aspect of the invention, there is provided a system comprising a communications device and a communications network, which communications network generally provides at least a direct cell access mechanism and an alternative cell access mechanism for the communications device for uplink access to the communications network, the communications network comprising:
5 means for determining and indicating to the communications device whether the direct cell access mechanism can at a given time be provided; and the communications device comprising:
10 means for receiving said indication.

Dependent claims contain preferable embodiments of the invention. The subject matter contained in dependent claims relating to a particular aspect of the invention is also applicable to other aspects of the invention.

15

BRIEF DESCRIPTION OF THE DRAWINGS

Embodiments of the invention will now be described by way of example with reference to the accompanying drawing in which:

20

Figure 1 shows a prior art cell access mechanism;

Figures 2 and 3 show an embodiment of the invention;

25 Figure 4 shows a base station according to an embodiment of the invention;

Figure 5 shows mobile terminal according to an embodiment of the invention; and

30

Figure 6 shows a layered protocol stack in an embodiment of the in-

vention.

DETAILED DESCRIPTION

5 Figures 2 and 3 show an embodiment of the invention. In this embodiment, a base station 120 first determines and then signals to a terminal 110 whether direct access to a traffic channel at a particular (high) data rate is permitted or whether an alternative cell access mechanism (with a lower initial data rate) should be used. In this embodiment, the terminal 110 is a mobile terminal and the base station 120 is a base station of a cellular communications network which controls the access to the network in a centralized manner. The mobile terminal 110 and the base station 120 communicate with each other by means of radio frequency communication over an air-interface (radio interface).

15 The base station 120 continuously performs measurements concerning the cell it is serving. These measurements may involve both radio and traffic measurements. Based on the measurements, the base station 120 gets information on the congestion level of the cell. Based on the congestion level, the base station 120 determines whether a direct uplink access to a traffic channel at a high data rate can be enabled. The base station 120 informs the mobile terminal 110 of the availability of the direct uplink access. For this purpose, a suitable parameter is defined. In this embodiment, this particular parameter is called *DirectCellAccess*. The parameter has two possible values: *Enabled* and *Disabled*. The value *Enabled* may be indicated by a binary digit "1" and the value *Disabled* may be indicated by a binary digit "0".

25 The base station 120 broadcasts system information over the coverage area of the cell it is serving. The broadcasting is effected by sending a broadcast message which is received by terminals residing inside the coverage area of the cell. In this embodiment, the parameter value *DirectCellAccess = Enabled* or *DirectCellAccess = Disabled* is broadcasted as a part of the system information broadcast.

- If the base station 120 determines that a direct uplink access to a traffic channel can be permitted (empty or lightly loaded cell), it periodically sends the parameter value *DirectCellAccess = Enabled* as a part of the system information broadcast 230 (Fig. 2) of the cell. The system information broadcast 230 is received by the mobile terminal 110. It reads an updated value of the *DirectCellAccess* parameter as often as instructed by the parameter(s) in the system information broadcast regulating the update frequency of system information.
- 10 If the base station 120 determines that a direct uplink access to a traffic channel cannot be permitted (cell loaded with traffic), it periodically broadcasts the parameter value *DirectCellAccess = Disabled* in the system information broadcast message 340 (Fig. 3).
- 15 When direct uplink access is enabled and the mobile terminal 110 has user data to send, it can directly start sending user data 150 (Fig. 2) on a traffic channel after a synchronization procedure specified by a physical layer (L1) (see Fig. 6 and the corresponding description) has been completed. Information on the traffic channel to be used may be communicated in an appropriate way to the mobile terminal 20 110. It may, for example, be communicated from the base station 120 beforehand. Also, if the system is a CDMA based system, the appropriate code(s) may be communicated from the base station 120 to the mobile terminal 110 beforehand. The term system is here considered to comprise a combination of appropriate network elements (such as a base station) and terminals.
- 25
- When direct uplink access is disabled and the mobile terminal 110 has user data to send, it shall not use direct uplink access but an alternative cell access mechanism has to be used. In the embodiment shown in Figure 3, the alternative method is the two-step cell access mechanism already known as such from the prior art in which 30 the mobile terminal 110 first sends an access request message 111 to the base station 120 and waits for a access grant message 121 from the base station 120 be-

fore starting to send user data 150 on a dedicated traffic channel (DCH or similar) as identified by the access grant message 121.

Modifications to the embodiment of the invention just described and other em-
5 bodiments will be described in the following.

It has been described that the base station 120 periodically sends the parameter value *DirectCellAccess* = *Enabled/Disabled* as a part of system information broadcast 230, 340. In one alternative embodiment, the parameter value is sent,
10 instead of a broadcast message, in a particular multicast message which is sent to a limited set of mobile terminals. The set is formed of mobile terminals which in general, based on a user subscription (or similar), have the right to use the direct uplink access. In yet another embodiment, the parameter value *DirectCellAccess* = *Enabled/Disabled* is sent as a point-to-point message to each mobile terminal
15 110 having right to use the direct uplink access. In yet another embodiment, the applicability of the *DirectCellAccess* parameter to individual terminals is further regulated by another parameter in the system information broadcast. This other parameter can define a certain pseudo-random group of terminals based on the least significant bits of a unique identifier such as subscriber identifier, equipment
20 identifier or similar.

In one embodiment, an expiration time is given by the system to the parameter *DirectCellAccess*. When e.g. the system information broadcast message is used, the expiration time may be specified as a constant value or as another parameter in
25 the system broadcast message. If the parameter value *DirectCellAccess* = *Enabled*, but it has been expired, the mobile terminal 110 may not use the expired parameter value, but has to retrieve a new one before it can start user data transmission according to the direct uplink access mechanism.

30 It has been described that the base station 120 performs measurements concerning the cell it is serving, and that it determines based on these measurements whether

the direct uplink access can be enabled. These measurements may involve both radio and traffic measurements. Which of them is/are used depends on the implementation. Typical radio measurements which may be used are, for example, measurement of the received total wide band power, SIR (Signal to Interference Ratio) measurement, BER (Bit Error Rate) measurement, FER (Frame Error Rate) measurement or other measurement on radio signal quality. Especially, the received total wide band power indicates whether there are many users accessing to the uplink direction.

10 A reader has been given the idea that the base station 120 locally controls the use of radio resources in its cell coverage area by e.g. determining the state of the direct uplink access mechanism. However, it should be clear that the final decision on the radio resources may alternatively be performed by another network element. Decisions are preferably performed by the base station 120, though, since
15 this would reduce the delay experienced by the terminal 110.

A typical environment in which the use of the direct uplink access fits well would be a packet switched system with small cell sizes and short data bursts (e.g. IP packet bursts (Internet Protocol)) and having only little continuous traffic. In a
20 lightly loaded cell, even if there is more than one terminal sending data at a high data rate, collisions are not very likely if the bursts are short. Thus, a high data rate transmission with only a small access delay can be provided to a restricted amount of users without compromising system performance.

25 Another advantage is that close to all cell uplink capacity can, in certain situations, be used for transfer of user data. For example, if a high data rate user is the only user of the cell, RACH channel capacity might either not be needed at all, or it needs to be reserved only for a new user to register to the cell or to perform handover to the cell. This kind of situation may arise e.g. with a private access
30 point. When direct uplink access to a traffic channel is enabled, only a minimum amount of RACH channel capacity is needed since one user cannot collide and

not many other users are expected to access via said access point. The “released” RACH channel capacity may thus be used for transfer of user data.

The basic ideas of the invention are, in principle, applicable to any digital wireless or cellular system with centralized architecture. This includes 2nd and 3rd generation and possible future generations of cellular systems as well as wireless local area networks, where both low delay and high throughput efficiency are targeted. No restrictions are placed on the general radio access method; it can be e.g. TDMA (time division multiple access) or CDMA (code division multiple access). The system involved may be a multicarrier system, such as an OFDM (Orthogonal Frequency Division Multiplexing) based system as well.

Figure 4 shows a base station 120 according to an embodiment of the invention. The base station comprises a processing unit 420, a radio frequency part 440 and a network interface 425. The processing unit 420 controls the operation of the base station 120. The radio frequency part 440 and the network interface 425 are coupled to the processing unit 420. The radio frequency part 440 receives and transmits user data from and to mobile terminals 110 which operate in the area of the cell which the base station 120 serves. Communication to and from the rest of the network is performed via the network interface 425.

The processing unit 420 comprises a Radio Resource Control (RRC) block. The mentioned radio and traffic measurements are performed by the radio frequency part 440 and/or the network interface 425 and analysed by the RRC block. The RRC block makes based on the analysis decisions on whether direct cell access should be enabled or disabled and controls the radio frequency part 440 such that the right parameter value (*DirectCellAccess = Enabled/Disabled*) is sent at each time to mobile terminals 110 concerned.

In other words, what the base station 120 actually does is that it controls the use of radio resources in the cell by enabling and disabling the usage of a cell access

mechanism. Combining this method with other means known from cellular and wireless systems further improves the efficiency of radio resource usage. When the cell is empty or lightly loaded, the base station 120 enables direct sending of user data on high data rate with only a small access delay. When the congestion level in the cell increases, only a slower access mechanism is permitted to be used in order to avoid collisions on the high data rate channel thereby saving radio resources.

Figure 5 shows a mobile terminal 110 according to an embodiment of the invention. In this embodiment, the mobile terminal 110 is a cellular mobile terminal comprising a processing unit MCU, a radio block 540 and a user interface UI. The processing unit MCU controls the operation of the mobile terminal 110 with the aid of software SW. The software SW resides in a memory 515. The radio block 540 and the user interface UI are coupled to the processing unit 420. The radio block 540 receives and transmits user data from and to the base station 120 by means of radio communication over an air-interface. The user interface UI may comprise a keyboard, a display, a microphone and a speaker (not shown) for enabling the user of the mobile terminal 110 to use the terminal 110.

The system information broadcast (or another message) 230, 340 carrying the parameter value *DirectCellAccess = Enabled/Disabled* is received via the radio block 540 and processed by the processing unit MCU. The software comprises a protocol layer corresponding to the RRC layer of the base station 120. Said protocol layer interprets the received parameter value and controls the radio block 540 so that the right access mechanism (direct cell access or an alternative mechanism) is used.

Figure 6 shows how the air-interface (radio interface) between the mobile terminal 110 and the base station 120 (or network) is layered into protocol layers according to the WCDMA system. A protocol stack having three layers is formed. Each protocol layer implemented in the mobile terminal 110 communicates with a corre-

sponding protocol layer implemented in the base station 120 (or network).

The lowest layer is the physical layer (Layer 1 (= L1)). The physical layer provides transport services to higher layers of the protocol stack. It provides transport
5 channels for communication, such as the RACH, CPCH and DCH mentioned in the foregoing description.

The second lowest layer (L2) is the radio link layer. It provides data transfer on logical channels. The logical channels can be divided into control and traffic
10 channels, wherein the control channels are used for transfer of control information only and the traffic channels are used for transfer of user data. Both types of channels are mapped onto the L1 transport channels.

The layer (L3) above the radio link layer is called the network layer. One of its
15 functions in a radio system is radio resource control which is performed by an RRC sublayer.

In one embodiment of the invention, the information on the availability of the direct access mechanism (*DirectCellAccess* parameter value) is transmitted on the
20 network level (L3). The RRC sublayer is capable of mobility services, such as handovers. Therefore, after high-speed user data transmission has begun in accordance with the direct uplink access mechanism on a traffic channel, the transmission can be continued during a possible handover. This is not possible e.g. with the prior art CPCH method in which transmission has to be stopped if transmission
25 conditions weaken.

The traffic channel on which the mobile terminal 110 can directly start sending user data according to the direct uplink access mechanism, may be defined as a
channel on which all the necessary RRC functions can be implemented, i.e. in this
30 case a traffic channel of the radio link layer (L2).

The layers L1, L2 and L3 can be implemented by a suitable combination of hardware and software in the mobile terminal 110 (Fig. 5) and base station 120 (Fig. 4).

- 5 Particular implementations and embodiments of the invention have been described. It is clear to a person skilled in the art that the invention is not restricted to details of the embodiments presented above (e.g. the parameter names, the configuration of the protocol layers), but that it can be implemented in other embodiments using equivalent means without deviating from the characteristics of the
- 10 invention. The scope of the invention is only restricted by the attached patent claims.

CLAIMS:

1. A method between a communications device and a communications network,
which communications network generally provides at least a direct cell access
5 mechanism and an alternative cell access mechanism for the communications
device for uplink access to the communications network, the method comprising:
determining by the communications network and indicating to the communications device whether the direct cell access mechanism can at a given
10 time be provided.
2. A method according to claim 1, wherein in a situation in which the direct cell
access can not be provided the method comprises:
indicating to the communications device that the alternative cell access
15 mechanism should be used.
3. A method according to claim 2, wherein the alternative cell access mechanism
comprises using a separate access channel for uplink access.
- 20 4. A method according to any preceding claim, wherein said indicating whether
the direct cell access mechanism can be provided comprises indicating
whether the communications device can directly start sending user data on a
traffic channel.
- 25 5. A method according to claim 4, wherein a radio interface between the mobile
communications device (110) and the base station (120) is layered into protocol
layers which form a protocol stack, and the traffic channel forms part of a
logical traffic channel operating on a data link layer (Layer 2) of the protocol
stack.
- 30 6. A method according to claim 5, wherein said indicating whether the commu-

nications device can directly start sending on a traffic channel is carried out on a network layer (Layer 3) of the protocol stack.

- 5 7. A method according to claim 1, wherein said indicating whether the direct cell access mechanism can be provided is performed by sending a broadcast message to a set of communications devices including the communications device of claim 1.
- 10 8. A method according to claim 7, wherein said broadcast message contains a parameter value further restricting the set of communications devices.
- 15 9. A method according to claim 1, wherein said indicating whether the direct cell access mechanism can be provided is performed by sending a multicast message to a limited set of communications devices including the communications device of claim 1.
- 20 10. A method according to claim 1, wherein said indicating whether the direct cell access mechanism can be provided is performed by sending a point-to-point message to the communications device.
- 25 11. A method according to any of the claims 7 to 10, wherein said message conveys to the communications device a parameter value indicating whether the direct cell access mechanism is enabled.
- 30 12. A method according to any preceding claim, wherein the communications network comprises a base station serving a cell of a mobile communications system, and wherein the method comprises:
 - performing traffic and/or radio measurements by the base station; and
 - determining by the base station whether the direct cell access mechanism can at a given time be provided on the basis of said measurements.

13. A communications device (110) configured for operation with a communications network, which communications network generally provides at least a direct cell access mechanism and an alternative cell access mechanism for the communications device (110) for uplink access to the communications network, the communications device (110) comprising:

means (RF, MCU, 515, SW) for receiving an indication sent by the communications network, the indication indicating to the communications device (110) whether the direct cell access mechanism can at a given time be provided.

10

14. A communications device (110) according to claim 13, wherein the communications device is a mobile hand-held device of a cellular communications network.

15. A base station (120) of a communications network, which communications network generally provides at least a direct cell access mechanism and an alternative cell access mechanism for a communications device (110) for uplink access to the communications network, the base station (120) comprising:

means (420, 425, 440) for determining and indicating to the communications device (110) whether the direct cell access mechanism can at a given time be provided.

16. A system comprising a communications device (110) and a communications network, which communications network generally provides at least a direct cell access mechanism and an alternative cell access mechanism for the communications device (110) for uplink access to the communications network, the communications network comprising:

means (420, 425, 440) for determining and indicating to the communications device (110) whether the direct cell access mechanism can at a given time be provided; and the communications device (110) comprising:

means (RF, MCU, 515, SW) for receiving said indication.

1/5

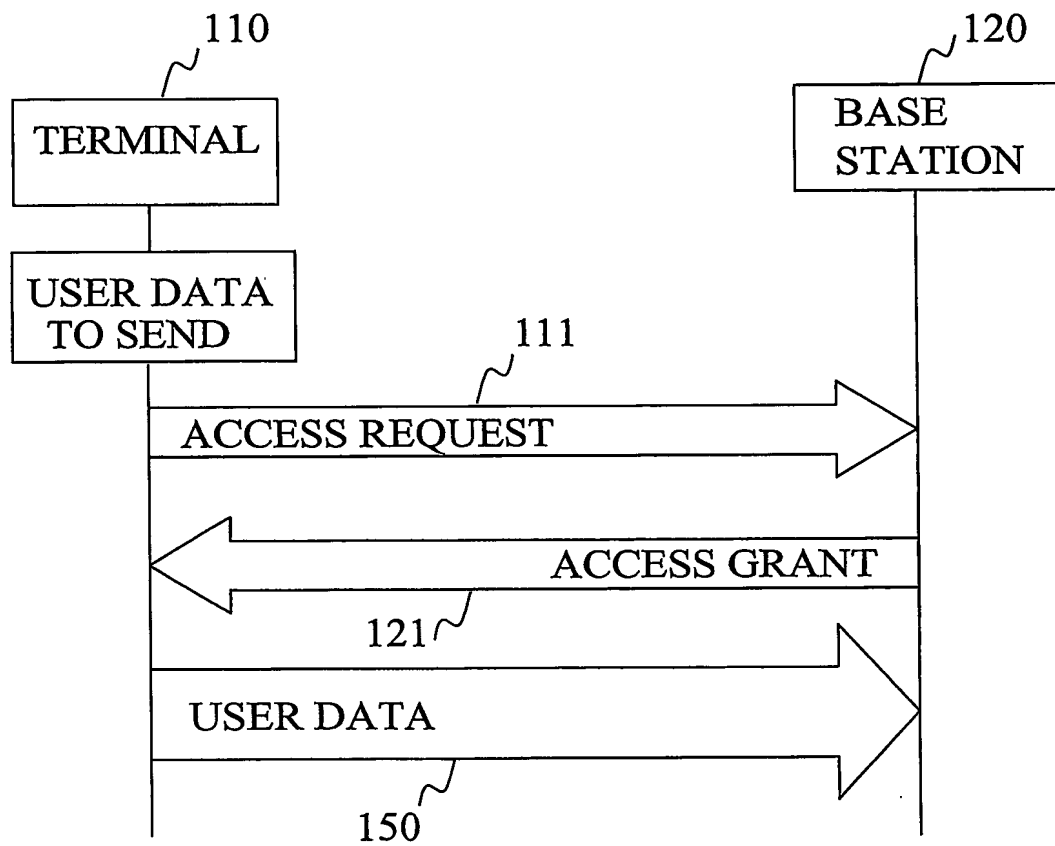


Fig. 1
Prior Art

2/5

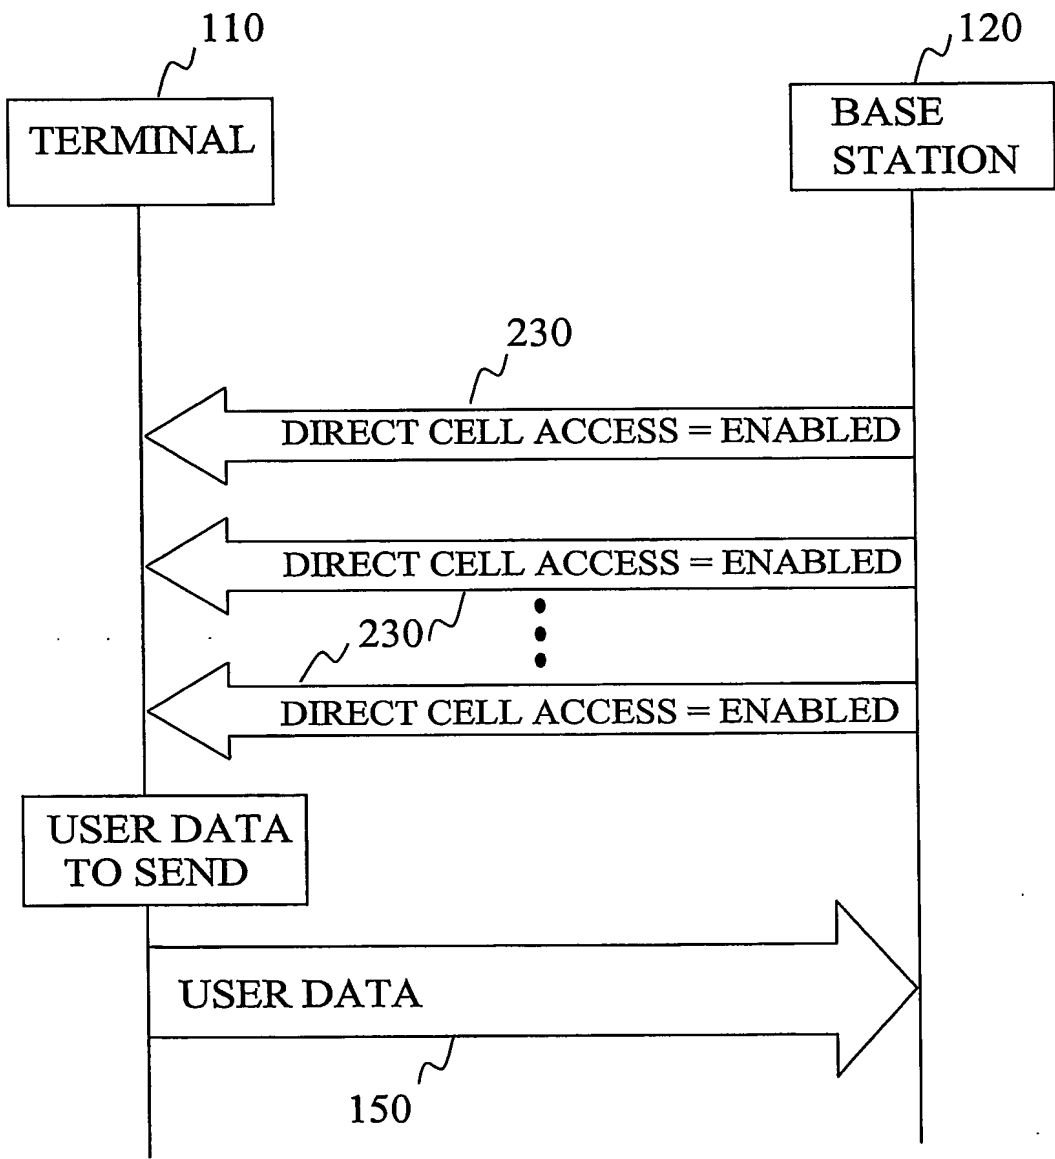


Fig. 2

3/5

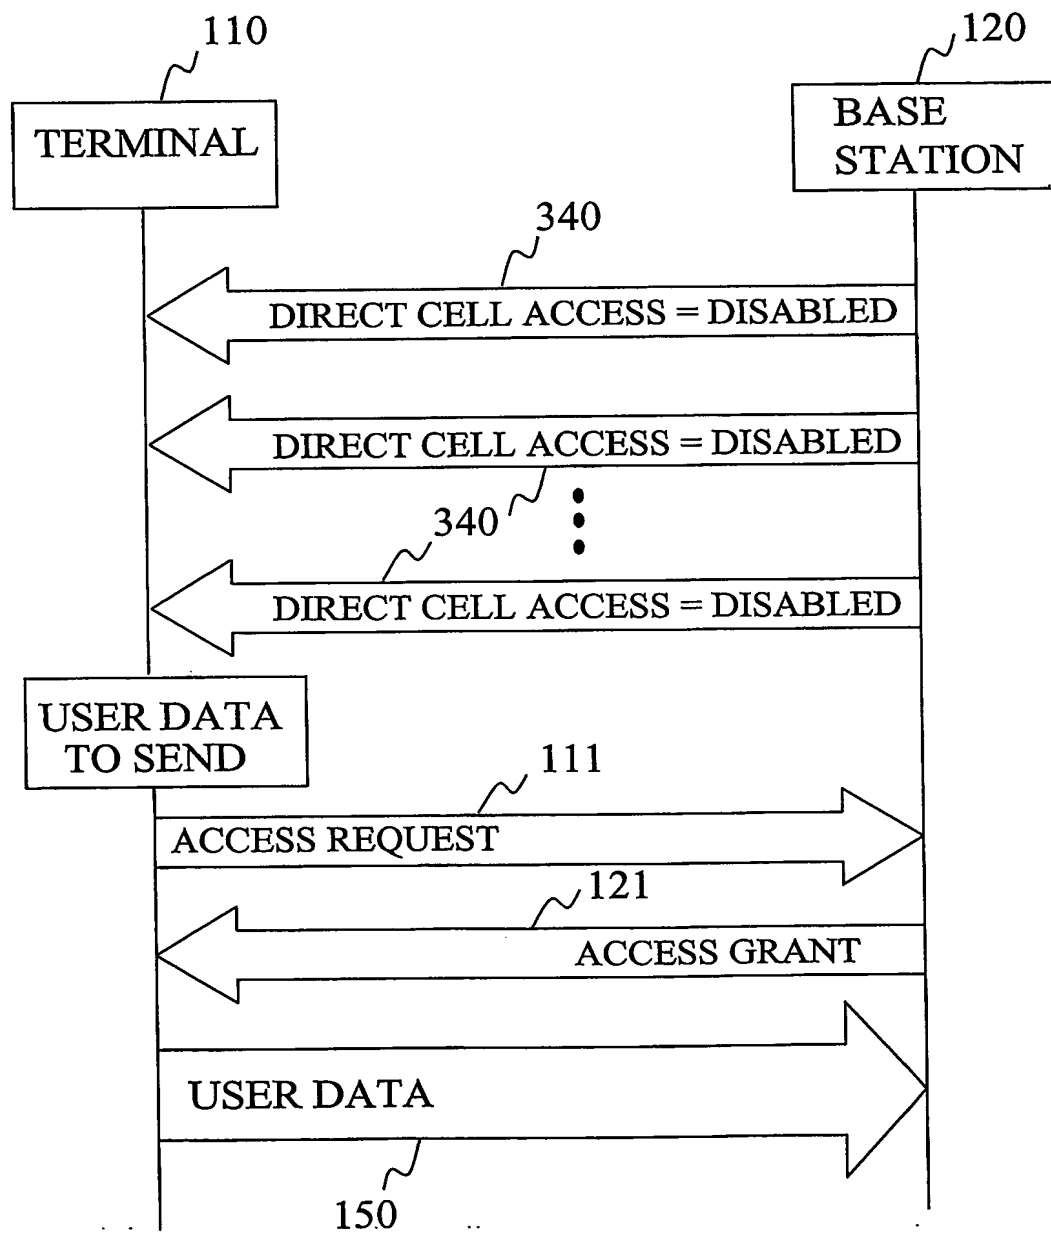


Fig. 3

4/5

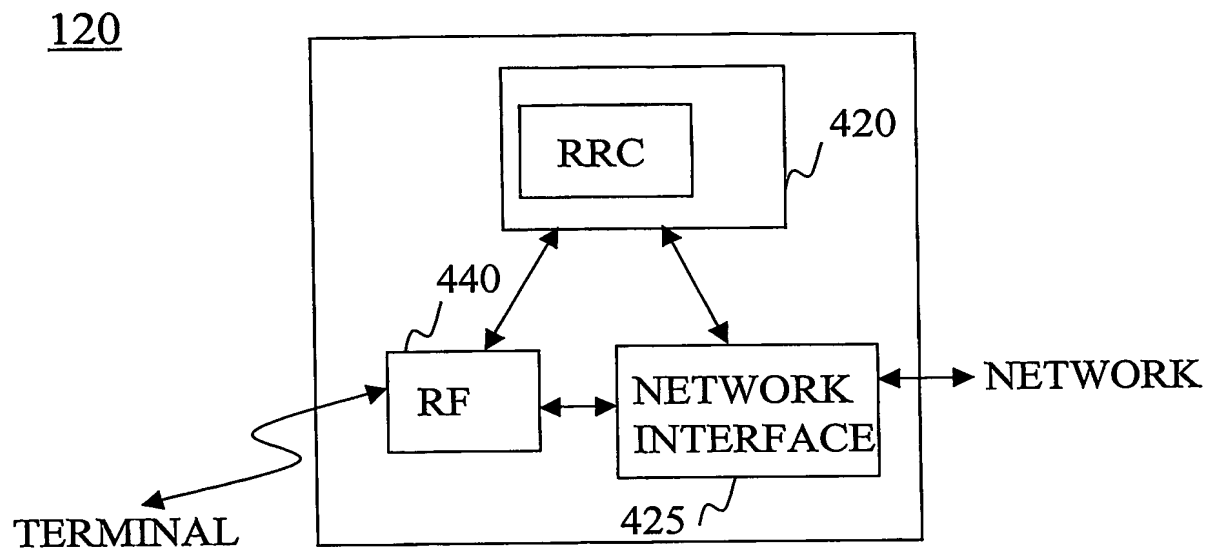


Fig. 4

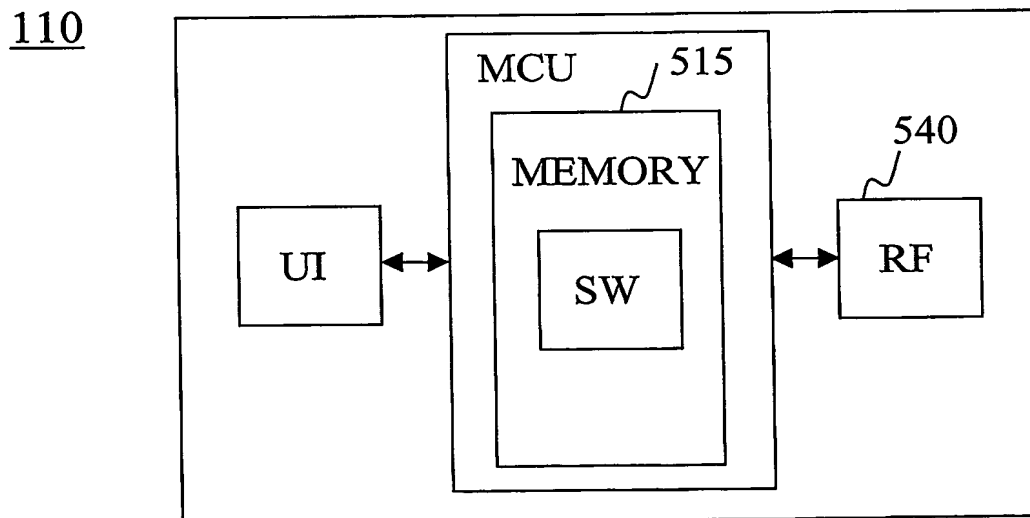


Fig. 5

5/5

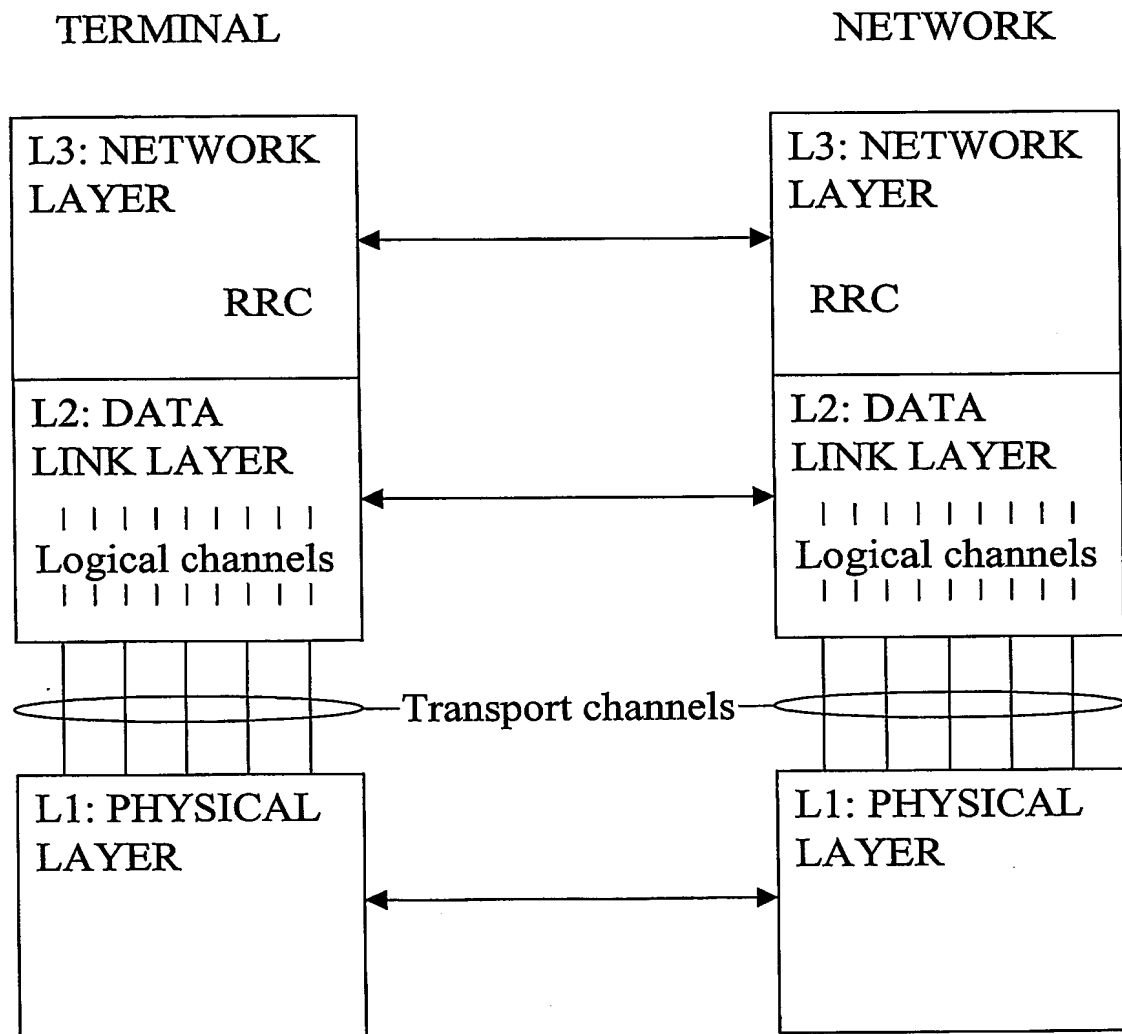


Fig. 6

INTERNATIONAL SEARCH REPORT

International application No.

PCT/FI 2003/000970

A. CLASSIFICATION OF SUBJECT MATTER

IPC7: H04Q 7/38

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC7: H04Q

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

SE,DK,FI,NO classes as above

Electronic data base consulted during the international search (name of data base and, where practicable, search terms used)

EPO-INTERNAL, WPI DATA, PAJ, INSPEC

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category*	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO 0186889 A1 (TELEFONAKTIEBOLAGET LM ERICSSON (PUBL)), 15 November 2001 (15.11.2001), page 4, line 1 - page 5, line 17 --	1-16
Y	WO 0217668 A1 (NOKIA CORPORATION), 28 February 2002 (28.02.2002), page 4, line 29 - page 8, line 7 --	1-16
A	US 2002025812 A1 (AHLSTRAND, S. ET AL), 28 February 2002 (28.02.2002), page 1, paragraph [0004]; page 2, paragraph [0028] -- -----	1-16

☐ Further documents are listed in the continuation of Box C.☒ See patent family annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier application or patent but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance: the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance: the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art

"&" document member of the same patent family

Date of the actual completion of the international search

12 February 2004

Date of mailing of the international search report

19-02-2004

Name and mailing address of the ISA/
 Swedish Patent Office
 Box 5055, S-102 42 STOCKHOLM
 Facsimile No. +46 8 666 02 86

Authorized officer

Catharina Karlsson /OGU
 Telephone No. +46 8 782 25 00

INTERNATIONAL SEARCH REPORT

Information on patent family members

International application No.

PCT/FI 2003/000970

EP	0186889	A1	15/11/2001	DE	3581914	D	00/00/0000
				JP	1752524	C	08/04/1993
				JP	4033142	B	02/06/1992
				JP	61156862	A	16/07/1986
				KR	9008207	B	05/11/1990
				US	4994889	A	19/02/1991
				US	5071784	A	10/12/1991

WO	0217668	A1	28/02/2002	AU	6703800	A	04/03/2002
				EP	1226731	A	31/07/2002

US	2002025812	A1	28/02/2002	NONE			

**This Page is Inserted by IFW Indexing and Scanning
Operations and is not part of the Official Record**

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ BLACK BORDERS
- ☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
- ☒ FADED TEXT OR DRAWING
- ☒ BLURRED OR ILLEGIBLE TEXT OR DRAWING
- ☐ SKEWED/SLANTED IMAGES
- ☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
- ☐ GRAY SCALE DOCUMENTS
- ☐ LINES OR MARKS ON ORIGINAL DOCUMENT
- ☒ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
- ☐ OTHER: _____

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.